



Cirro CC 73S- Vitreous China Rimless One-Piece Space-Saving Elongated Toilet for Small Bathrooms with Skirted Trapway Floor Outlet, 1.28 gpf (4.8 lpf) with Seat





DIMENSIONS

Length	595mm
Width	360mm
Height	710mm
Seat Height	418mm

COLOURS AND FINISHES

Gloss White

CERTIFICATIONS & APPROVALS

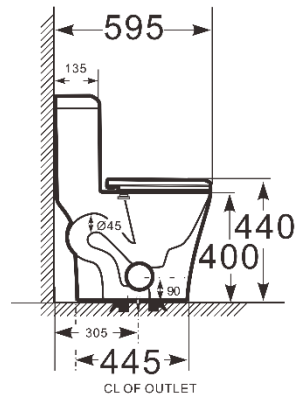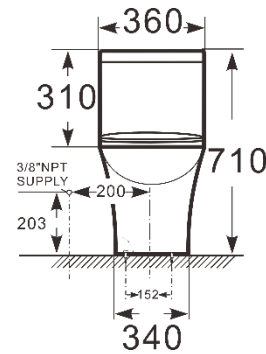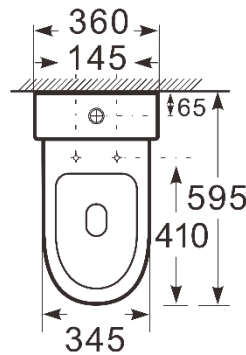

ZERO RIM



VORTEX



QUIET FLUSH



EASY TO INSTALL
UNINSTALL LID CLOSE LID



HIGH QUALITY
GLAZE



ENHANCED HYGIENE
AND EASE OF CLEANING



SPACE SAVING

FEATURES

Featured Tech
Flushing system
Nominal water consumption
Material
Rough-in
Flush button type
Bowl Shape
Seat height

Lid Shape

Trapway size

Rimless
Single Nozzle Vortex, Dual flush
4.8L Full flush/ 4.1L Half flush
Vitreous china
S-Trap 305mm
Buttons
Compact elongated - Ultra short
418mm

Compact elongated - Ultra short, Urea-Formaldehyde (UF) Thermoset Plastic soft close, quick release
45mm


Images are for illustrative purposes only.



COMPATIBLE WITH



Soft Close Quick-Release,
Easy-Clean lid for Cirro CC
73S Toilets



Dual Flush Buttons



R&T INFILL VALVE for
Cirro Toilet



R&T FLUSH VALVE, DUAL
FLUSH for
Cirro Toilet



TECHNICAL REQUIREMENTS

Toilet type	One-piece Toilet
Installation Type	Floor-mounted
Water surface size	155mm x 115mm
Min static pressure	138 kPa
Max static pressure	552 kPa
Min flowing pressure	172 kPa
Min flow rate	1.6 lpm
Water Supply Location	~203mm from floor to inlet, and 152mm – 203mm offset from centerline

STANDARDS

ASME A112.19.2/CSA B45.1
U.S. EPA WaterSense® Specification for HETs (High-Efficiency Toilets)
U.S. Department of Energy (DOE) Energy Policy Act 1992
ADA / ICC ANSI A117.1 (when installed per code)
Certified by IAPMO R&T
California Energy Commission (CEC)
ICC/ANSI A117.1
CSA B651

KEY ADVANTAGES

- **Ultra-Compact Design Ideal for Small Bathrooms**
With its short projection and elongated profile, this toilet is specifically engineered to fit in tight spaces—making it an excellent choice for powder rooms, apartments, and space-conscious renovations without compromising functionality or comfort.
- **High-Efficiency 1.28 GPF Flushing System**
Consumes only 1.28 gallons per flush (approximately 4.8 litres), fully compliant with the EPA WaterSense® and cUPC certification standards—saving water while delivering strong flushing performance.
- **Rimless Bowl Design for Enhanced Hygiene**
The rimless design prevents dirt build-up and ensures thorough rinsing with every flush, reducing bacteria growth and improving overall hygiene.
- **Skirted Trapway for Easy Cleaning**
The fully skirted design conceals the trapway, giving the toilet a sleek, modern look and making the exterior easier to clean.
- **Compact Elongated Bowl for Comfort and Room Saving**
The compact elongated seat is space saving and offers comfort to the users.
- **Standard 12" Rough-In Compatibility**
Designed with a 305 mm (12") rough-in, suitable for most residential and commercial bathroom installations in the U.S. market.
- **Soft-Close Thermoplastic Seat Included**
Comes with a quiet-close thermoplastic seat to prevent slamming, reduce noise, and increase durability during everyday use.
- **High-Quality Glazed Vitreous China**
Made of premium glazed ceramic, featuring a smooth, stain-resistant surface that ensures long-lasting durability and a polished appearance.

INCLUDED COMPONENTS (For references, final list may vary according to SKU number)

Standard Package Includes:

- One-piece vitreous china toilet
- Soft-close toilet seat
- Seat mounting hardware kit
- Flush system set (fill valve + 3" flush valve)
- Chrome-plated flush button
- Floor mounting bolt kit
- Wax ring seal
- Decorative bolt caps (2 pcs)
- Installation manual (English)

Water supply line and angle stop valve are not included and must be purchased separately.