

Crestwood CC 71A - Vitreous China Rimless One-Piece Elongated Toilet with Skirted Trapway Floor Outlet, 1.28 gpf (4.8 lpf) with Seat




DIMENSIONS

Length	26-3/8"
Width	22-1/4"
Height	26-9/16"
Seat Height	17-3/4"


COLORS AND FINISHES

Gloss White

CERTIFICATIONS & APPROVALS



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ICC ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES.

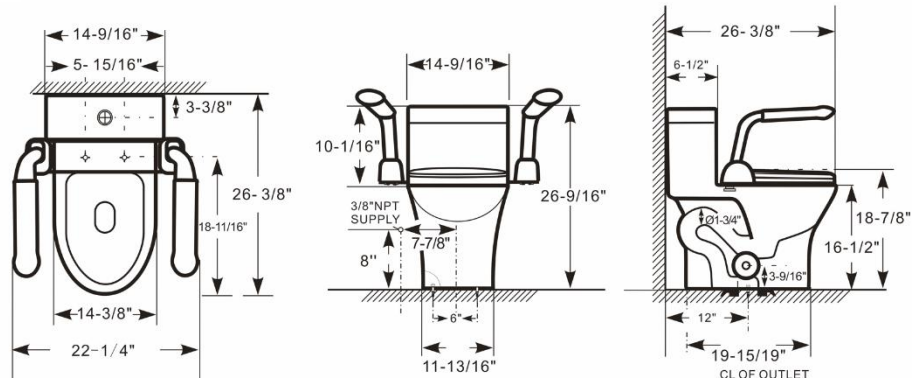

ZERO RIM



VORTEX



QUIET FLUSH



HIGH WATER EFFICIENCY



EASY TO INSTALL
UNINSTALL LID



SOFT
CLOSE LID



ELONGATED
SEAT



HIGH QUALITY
GLAZE



COMFORT HEIGHT
SEATING



ENHANCED HYGIENE
AND EASE OF CLEANING

FEATURES

Featured Tech
Flushing system
Nominal water consumption
Material
Rough-in
Flush button type
Bowl Shape
Seat height
Lid Shape
Trapway size

Rimless
Dual Nozzle Vortex, Dual flush
1.28 GPF Full flush/ 1.08 GPF Half flush
Vitreous china
S-Trap 12"
Buttons
Elongated
Elongated, Urea-Formaldehyde (UF) Plastic or PP, soft close, quick release
1-3/4"

Images are for illustrative purposes only.

COMPATIBLE WITH



PP Soft Close Quick-Release, Easy-Clean lid for Crestwood CC 71A Toilets



Dual Flush Buttons



R&T INFILL VALVE for
CC 71A Toilet



R&T FLUSH VALVE, DUAL
FLUSH for
CC 71A Toilet



TECHNICAL REQUIREMENTS

Toilet type	One-piece Toilet
Installation Type	Floor-mounted
Water surface size	7-1/2" x 5-1/8"
Min static pressure	20 psi
Max static pressure	80 psi
Min flowing pressure	25 psi
Min flow rate	0.43 gpm
Water Supply Location	~8" from floor to inlet, and 6" – 8" offset from centerline

STANDARDS

ASME A112.19.2/CSA B45.1
U.S. EPA WaterSense® Specification for HETs (High-Efficiency Toilets)
U.S. Department of Energy (DOE) Energy Policy Act 1992
ADA / ICC ANSI A117.1 (when installed per code)
Certified by IAPMO R&T
California Energy Commission (CEC)
ICC/ANSI A117.1
CSA B651

KEY ADVANTAGES

- **ADA-Compliant Comfort Height Design**
The toilet seat height reaches 17-3/4", consisting of a 16-1/2" ceramic base and a 1-3/16" thick seat, meeting ADA accessibility requirements when installed. This ensures greater comfort for all users.
- **Handles with maximum load of 264 lbs, enabling users to get up easily**
- **High-Efficiency 1.28 GPF Flushing System**
Consumes only 1.28 gallons per flush, fully compliant with the EPA WaterSense® and cUPC certification standards—saving water while delivering strong flushing performance.
- **Rimless Bowl Design for Enhanced Hygiene**
The rimless design prevents dirt build-up and ensures thorough rinsing with every flush, reducing bacteria growth and improving overall hygiene.
- **Skirted Trapway for Easy Cleaning**
The fully skirted design conceals the trapway, giving the toilet a sleek, modern look and making the exterior easier to clean.
- **Elongated Bowl for Superior Comfort**
The elongated seat offers more space and better ergonomics than round-front bowls, enhancing user comfort during use.
- **Standard 12" Rough-In Compatibility**
Designed with a 12" rough-in, suitable for most residential and commercial bathroom installations in the U.S. market.
- **Soft-Close Thermoplastic Seat Included**
Comes with a quiet-close thermoplastic seat to prevent slamming, reduce noise, and increase durability during everyday use.
- **High-Quality Glazed Vitreous China**
Made of premium glazed ceramic, featuring a smooth, stain-resistant surface that ensures long-lasting durability and a polished appearance.

INCLUDED COMPONENTS (For references, final list may vary according to SKU number)

Standard Package Includes:

- One-piece vitreous china toilet
- Soft-close toilet seat
- Seat mounting hardware kit
- Flush system set (fill valve + 3" flush valve)
- Chrome-plated flush button
- Floor mounting bolt kit
- Wax ring seal
- Decorative bolt caps (2 pcs)
- Installation manual (English)

Water supply line and angle stop valve are not included and must be purchased separately.