

## Crestwood CC 71A - Vitreous China Rimless One-Piece Elongated Toilet with Skirted Trapway Floor Outlet, 1.28 gpf (4.8 lpf) with Seat




### DIMENSIONS

|             |       |
|-------------|-------|
| Length      | 670mm |
| Width       | 565mm |
| Height      | 675mm |
| Seat Height | 450mm |


### COLOURS AND FINISHES

Gloss White

### CERTIFICATIONS & APPROVALS



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ICC ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES.

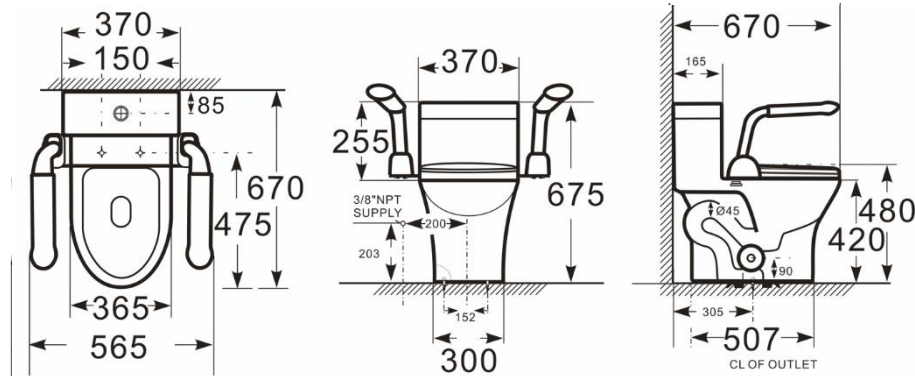

ZERO RIM



VORTEX



QUIET FLUSH



HIGH WATER EFFICIENCY



EASY TO INSTALL  
UNINSTALL LID



SOFT CLOSE LID



ELONGATED  
SEAT



HIGH QUALITY  
GLAZE



COMFORT HEIGHT  
SEATING



ENHANCED HYGIENE  
AND EASE OF CLEANING

## FEATURES

Featured Tech  
Flushing system  
Nominal water consumption  
Material  
Rough-in  
Flush button type  
Bowl Shape  
Seat height  
Lid Shape  
Trapway size

Rimless  
Dual Nozzle Vortex, Dual flush  
4.8L Full flush/ 4.1L Half flush  
Vitreous china  
S-Trap 305mm  
Buttons  
Elongated  
450mm  
Elongated, Urea-Formaldehyde (UF) Plastic or PP , soft close, quick release  
45mm

Images are for illustrative purposes only.

COMPATIBLE WITH



PP Soft Close Quick-Release, Easy-Clean lid for Crestwood CC 71A Toilets



Dual Flush Buttons



R&T INFILL VALVE for  
CC 71A Toilet



R&T FLUSH VALVE, DUAL  
FLUSH for  
CC 71A Toilet



## TECHNICAL REQUIREMENTS

|                       |                                                                      |
|-----------------------|----------------------------------------------------------------------|
| Toilet type           | One-piece Toilet                                                     |
| Installation Type     | Floor-mounted                                                        |
| Water surface size    | 190mm x 130mm                                                        |
| Min static pressure   | 138 kPa                                                              |
| Max static pressure   | 552 kPa                                                              |
| Min flowing pressure  | 172 kPa                                                              |
| Min flow rate         | 1.6 lpm                                                              |
| Water Supply Location | ~203mm from floor to inlet, and 152mm – 203mm offset from centerline |

## STANDARDS

ASME A112.19.2/CSA B45.1  
U.S. EPA WaterSense® Specification for HETs (High-Efficiency Toilets)  
U.S. Department of Energy (DOE) Energy Policy Act 1992  
ADA / ICC ANSI A117.1 (when installed per code)  
Certified by IAPMO R&T  
California Energy Commission (CEC)  
ICC/ANSI A117.1  
CSA B651

## KEY ADVANTAGES

- **ADA-Compliant Comfort Height Design**  
The toilet seat height reaches 450 mm (17-3/4"), consisting of a 420 mm ceramic base and a 30 mm thick seat, meeting ADA accessibility requirements when installed. This ensures greater comfort for all users.
- **Handles with maximum load of 120 kg, enabling users to get up easily**
- **High-Efficiency 1.28 GPF Flushing System**  
Consumes only 1.28 gallons per flush (approximately 4.8 litres), fully compliant with the EPA WaterSense® and cUPC certification standards—saving water while delivering strong flushing performance.
- **Rimless Bowl Design for Enhanced Hygiene**  
The rimless design prevents dirt build-up and ensures thorough rinsing with every flush, reducing bacteria growth and improving overall hygiene.
- **Skirted Trapway for Easy Cleaning**  
The fully skirted design conceals the trapway, giving the toilet a sleek, modern look and making the exterior easier to clean.
- **Elongated Bowl for Superior Comfort**  
The elongated seat offers more space and better ergonomics than round-front bowls, enhancing user comfort during use.
- **Standard 12" Rough-In Compatibility**  
Designed with a 305 mm (12") rough-in, suitable for most residential and commercial bathroom installations in the U.S. market.
- **Soft-Close Thermoplastic Seat Included**  
Comes with a quiet-close thermoplastic seat to prevent slamming, reduce noise, and increase durability during everyday use.
- **High-Quality Glazed Vitreous China**  
Made of premium glazed ceramic, featuring a smooth, stain-resistant surface that ensures long-lasting durability and a polished appearance.

## INCLUDED COMPONENTS (For references, final list may vary according to SKU number)

### Standard Package Includes:

- One-piece vitreous china toilet
- Soft-close toilet seat
- Seat mounting hardware kit
- Flush system set (fill valve + 3" flush valve)
- Chrome-plated flush button
- Floor mounting bolt kit
- Wax ring seal
- Decorative bolt caps (2 pcs)
- Installation manual (English)

Water supply line and angle stop valve are not included and must be purchased separately.